

D1500 Manual Barrier



SPECIFICATION

MAXIMUM SPAN:

Standard Version: 7.0M, Heavy Duty Version: 9.0m

BOOM DIAMETER:

HEIGHT:


1m from base plate to centre of boom. Total barrier height: 1150mm

DIMENSIONS:

Stanchion: 250mm square box section, 400 x 400mm Base Plate

FINISH:

Polyester Powder Coated in red and white as standard

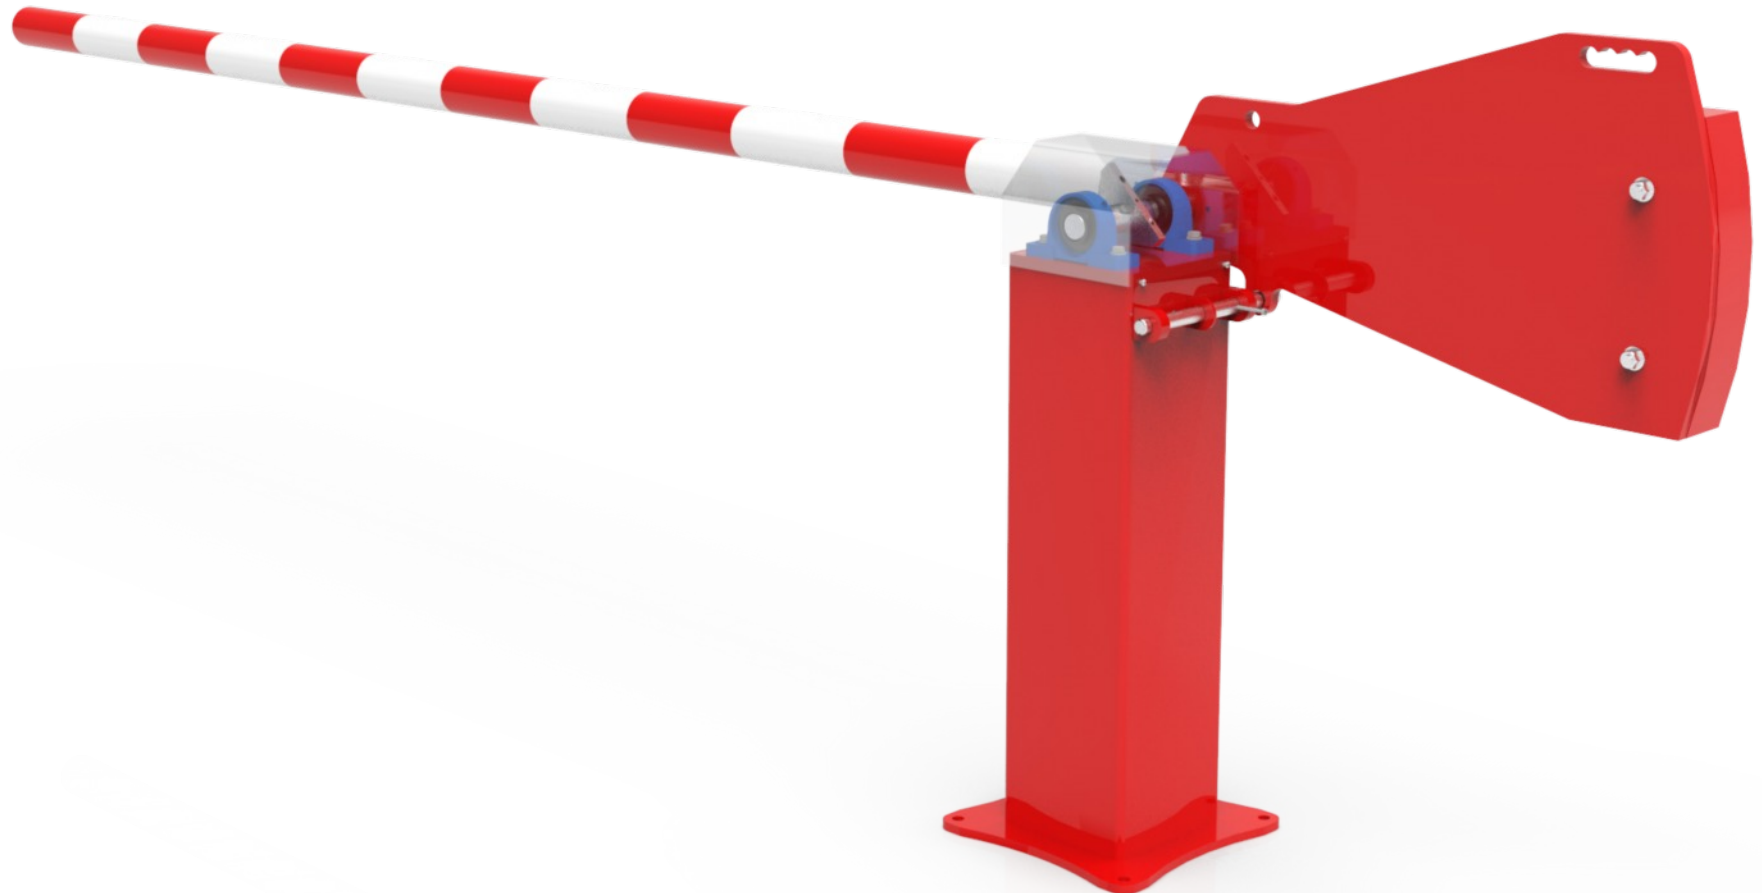

TIP REST

An adjustable bolt down boom tip rest is supplied at no additional cost, whilst a folding “pogo” type tip rest is optionally available.





OPTIONAL ITEMS

A lower skirt can be fitted to the barrier at additional cost, and high visibility STOP or NO ENTRY signs may be specified to the boom.



LOCKING

A slide latch is fitted to allow the barrier to be latched in the closed or raised position. A facility to fit a padlock in either position is also provided (padlock not supplied).

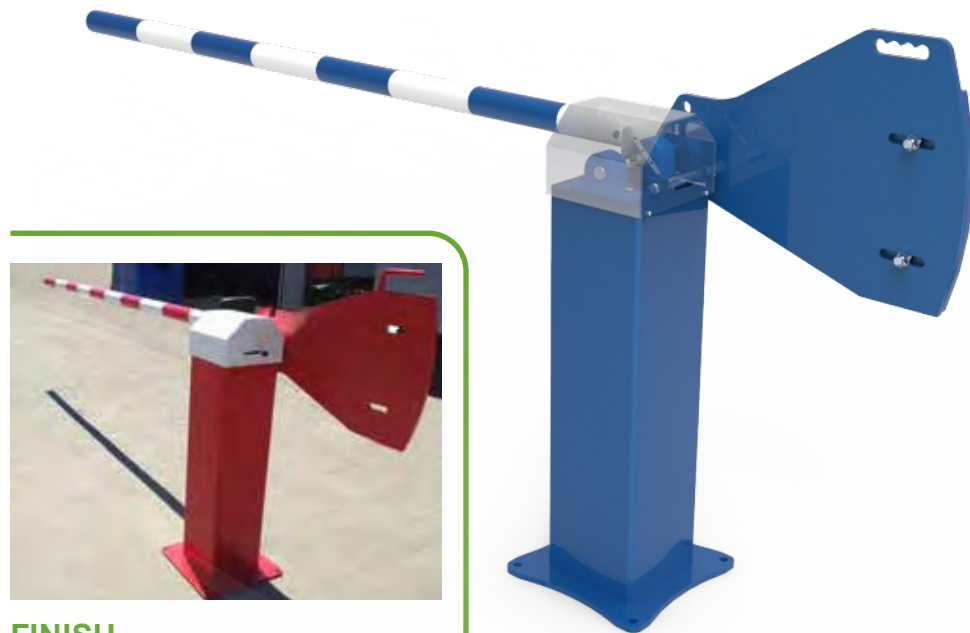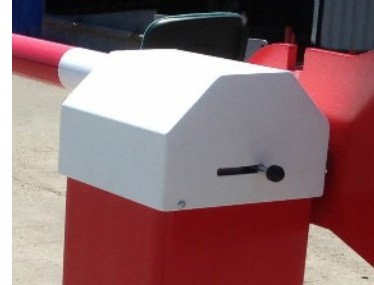

FINISH

Barriers are powder coated in red and white or black and yellow as standard, however, other standard RAL colours may be specified at no additional cost. Booms are vinyl striped in red and white with a limited choice of other vinyl colours.

BARRIER DESIGN

The stanchion has a clean contemporary appearance with an enclosed bearing for maximum longevity. Counterweights balance the boom and minimise the effort needed to operate the barrier.

