
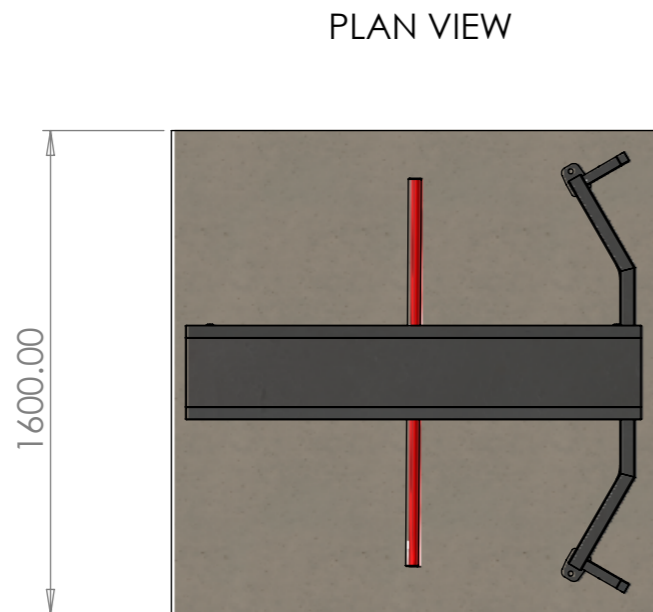
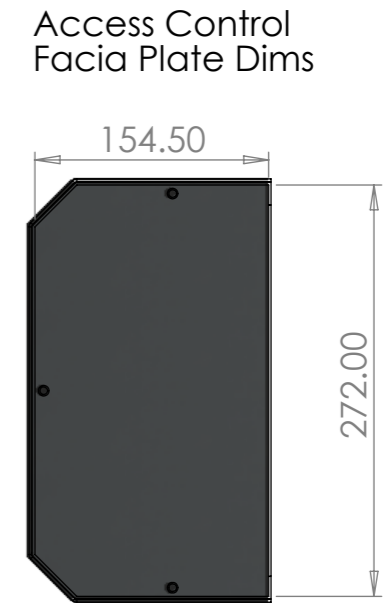
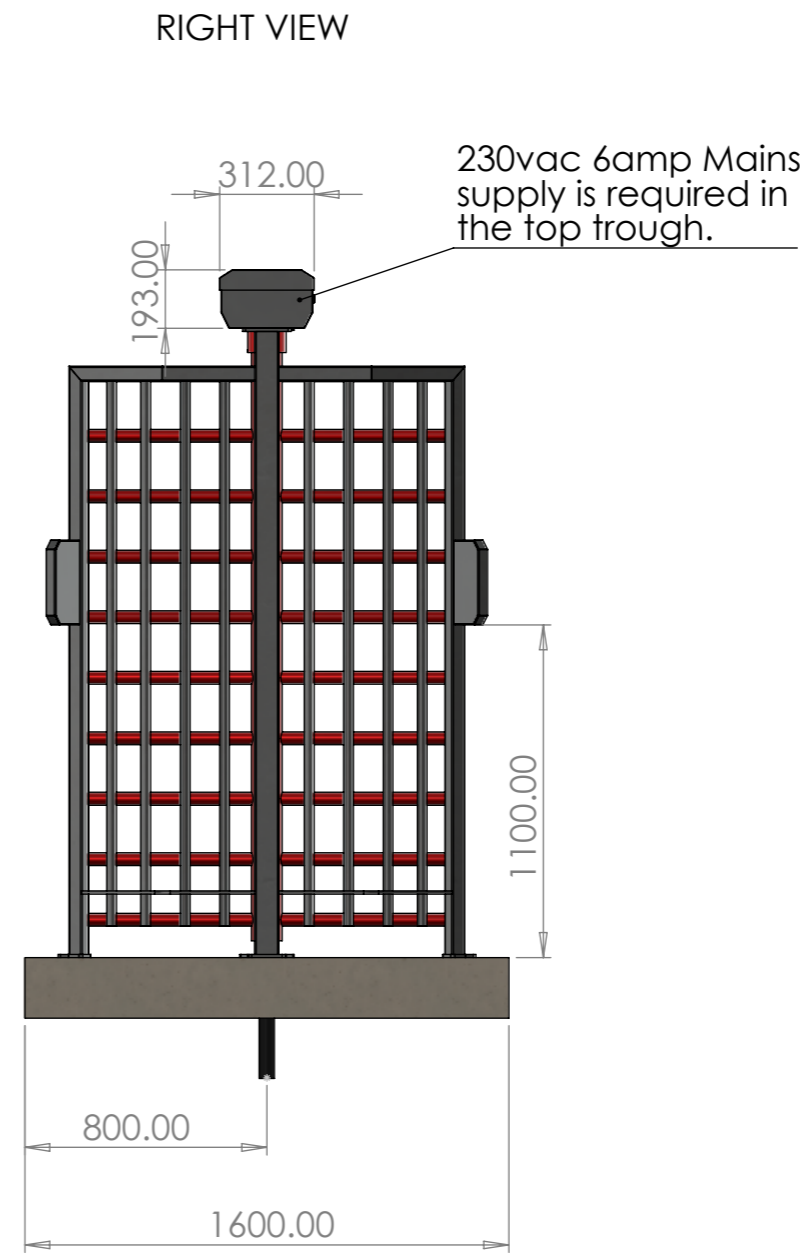


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS				FINISH: RAL 7016 frame with RAL 3020 Rotor		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
SURFACE FINISH:				RAL 7016 frame with RAL 3020 Rotor				Dwg No			
TOLERANCES:											
LINEAR:								D4150 90 Degree			
ANGULAR:											
		NAME		SIGNATURE		DATE		TITLE:			
DRAWN		A Mcginley				01/07/22		D4150 Ver 2.0 90 Degree			
CHK'D											
APPV'D								DWG NO.		A3	
MFG								D4150 Ver 2.0 90 Degree			
Q.A								SCALE:1:50		SHEET 1 OF 2	
						WEIGHT:					

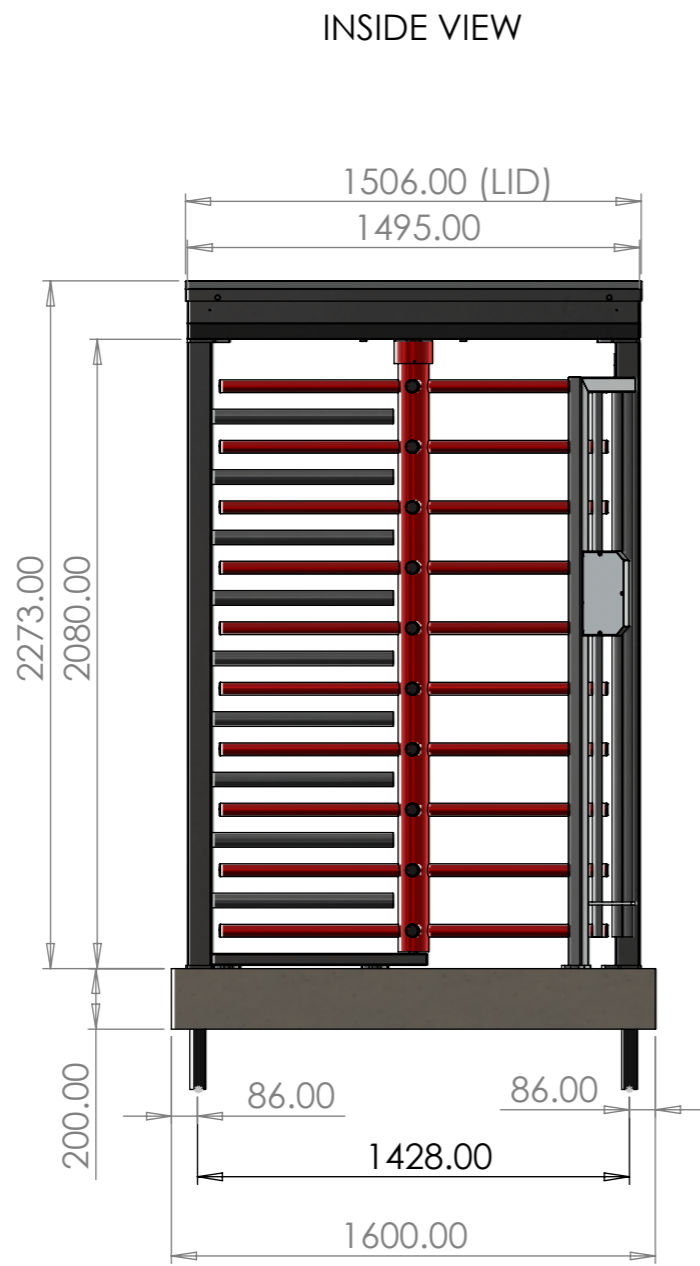

Civils Note
 All foundations MUST be flat and level with each other,
 Concrete MUST be grade C35 and MUST be poured 7 x days
 prior the the gate being installed. All Ducting MUST be 50mm
 minimum ID and must have pull ropes in. The Turnstiles will be bolted
 down using M12 Self expanding bolts.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS			FINISH: RAL 7016 frame with RAL 3020 Rotor		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION		
SURFACE FINISH:							Dwg No				
TOLERANCES:											
LINEAR:							TITLE: D4150 90 Degree				
ANGULAR:											
DRAWN			NAME		SIGNATURE		DATE		DWG NO.		
CHK'D			A Mcginley				01/07/22		D4150 Ver 2.0 90 Degree		
APPV'D									A3		
MFG									SCALE:1:50		
Q.A									SHEET 2 OF 2		
									WEIGHT:		