

D4150

FULL HEIGHT TURNSTILE



CLEAR WALKWAY
600mm width

DIMENSIONS
1520x1360x2230mm


CONFIGURATION
120° 3 arm rotor

FINISH
Primed/powder coated

CLEAR HEAD HEIGHT
2070mm


CONTROL PANEL
PLC

POWER SUPPLY
230v, 50Hz, 5AMP

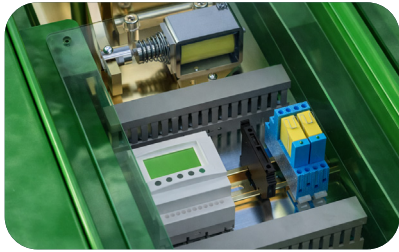


PLC

Housed in a lockable overhead enclosure, the plc controlled bi-directional mechanism allows one passage per activation, and may be locked or set to free movement in either or both directions.

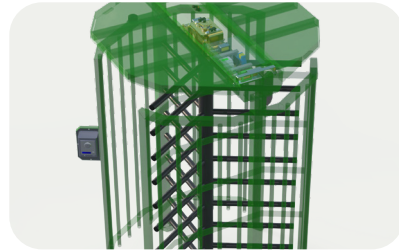


CONSTRUCTION

The frame and rotor are fully welded heavy duty steel components for maximum strength and longevity, and the rotor pivots on a sealed roller bearing. The rotor arms are 40mm diameter arranged in 120° configuration for easy pedestrian access.

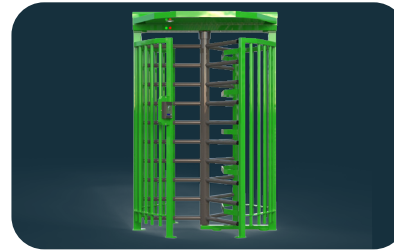

STANDARD SINGLE

Our most popular configuration, offering an ideal balance of security, throughput, and footprint.

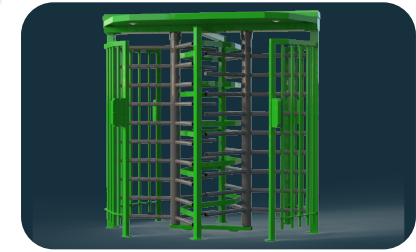


STANDARD DOUBLE

Designed for sites requiring dual entry points, the double configuration maximises throughput while optimising available space.



ACCESS CONTROL

Small mounting plates are fitted as standard to enable fitting of most access control systems. Upgrades may be specified if you need to mount intercoms or larger items.

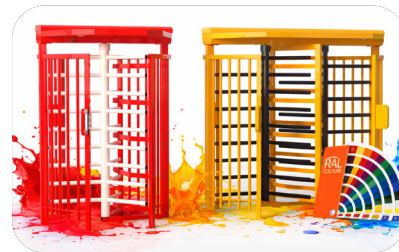


FINISH

D4150 turnstiles are powder coated in any standard RAL colour at no additional charge and you can even specify the rotor in a contrasting colour to the frame. LED backlit logos can be water jet cut to the overhead enclosure at additional cost.



4 x 90° ROTOR

A high-security solution designed to strictly control access, allowing one person per passage and restricting entry with luggage or oversized items.

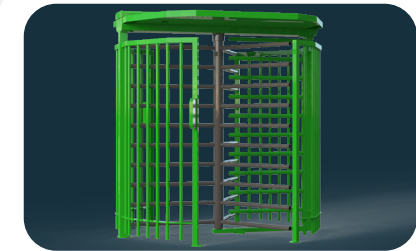

EXTENDED 900mm PASS-THROUGH

Ideal for locations where wider access is required, accommodating larger users or specific operational needs.



INTEGRATED PEDESTRIAN GATE

Provides compliant access for disabled users or alternative entry requirements. Available with manual, semi-automatic, or fully integrated pedestrian gate options.

