

D6200

AUTOMATIC PEDGATE



MAXIMUM SPAN

1.5m

DRIVES

Locinox Magnus

LOCKING

300kg Maglock

C4 Grade

MAXIMUM HEIGHT

2.4m

SAFETY

Lower and vertical Cat 3 safety edges

Dual-height photocells

FINISH

Primed and Polyester Powder Coated

in a Standard RAL colour





GATE DRIVE

The D6200 features the Locinox Magnus gate drive, capable of handling gates up to 1.5m wide and 200kg in weight, making it ideal for pedestrian gates. It offers a stylish design and exceptionally smooth operation.




LOCK

The D6200 comes equipped as standard with the Locinox MAG3000 maglock, delivering a 300kg holding force and integrating seamlessly with the Magnus drive for reliable, secure operation.



GATE INFILLS

The D6200 range is available with a variety of infill options, including vertical tube, 358 mesh, 200x50 V mesh, palisade, and many more to suit different security and aesthetic requirements.

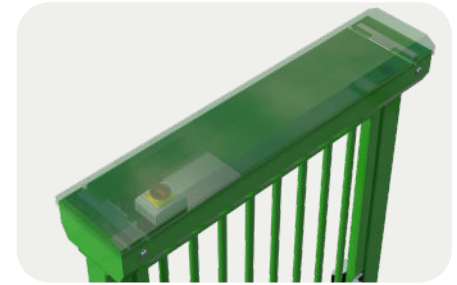


GATE TROUGH

The D6200 offers an optional top trough, enabling all access control equipment to be conveniently housed within the gate. This is particularly beneficial for sites where there is no available space for a separate control panel.



GATE INTEGRATION

UMD Pedgates can be seamlessly integrated with our wider product range, including sliding gates, swing gates, and turnstiles. This integration ensures a quick and efficient installation process, while enabling accurate system design from the outset using 3D CAD.

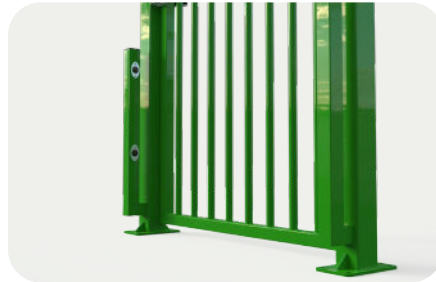

GATE SAFETY

The D6200 comes with dual-height photocells as standard, while the Magnus drive features built-in obstacle detection, ensuring safe operation.



GATE FINISH

The gate is supplied as standard with a primed and polyester powder-coated finish, available in a wide range of standard RAL colours. Additional finish options are also available, including plastisol coating, galvanising, and others, depending on specific site requirements.

